

# CONVEYOR CHANNEL CLEATS



Advance Anti-Slip Surfaces manufacture a concise range of Class One, ready to install, metal backed antislip Conveyor Channel Cleats with a durable non-slip surface designed to provide firm footing on any type of conveyor ramp or walkway, even with a sharp rising incline. Conveyor Channel Cleats come in a standard profile of 10mm high by 50mm in depth and a width from 450mm to 1200mm long, that are intended to suit most pedestrian access areas.




## STANDARD SIZES COMBINATIONS

WIDTH (A)	+	DEPTH (B)	+	RETURN (C)
580mm		50mm		10mm
730mm		50mm		10mm
880mm		50mm		10mm
1030mm		50mm		10mm
1180mm		50mm		10mm

*Custom sizes available, Made To Order*

## MEASUREMENTS

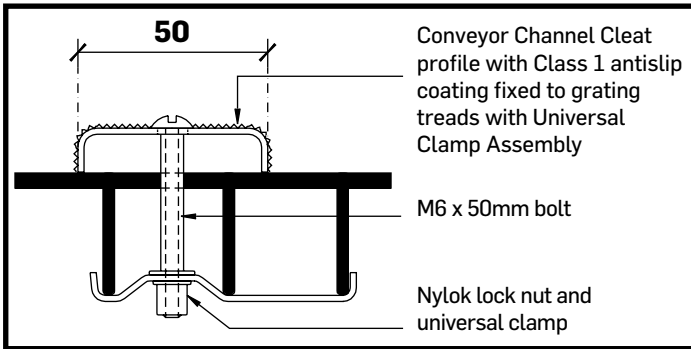

## PRODUCT FEATURES

- Provides secure footing on wet & oily surfaces
- Robust, durable, reliable
- Available in many colour options.
- Pre-Drilled for simple installation.
- Australian Standard 4586:2013 compliant.
- Backed by Advance Anti-Slip's extensive warranty.
- High impact resistance.
- Excellent chemical & UV resistance.
- Long effective life.
- Easy to clean.



## INSTALLATION GUIDE

Universal Clamp Assembly at regular intervals.

Pre-drilled holes come as standard.

If additional holes are required, mark the hole positions and drill through from the underside of the foundation.

Make sure there are sufficient holes to anchor the conveyor channel cleat to the grating structure.

## AS 1657 – 2013 Section 5.3.2 Slip Resistance

Slip resistance shall comply with clause 3.1.3

Where the angle of slope of the walking surface is between 10° and 20°, the surface shall have cleats fitted across the full length of the walking surface at 90° to the direction of travel.

## AS 1657 – 2013 Section 5.3.3 Cleats

Cleats shall be of metal, not less than 10mm x 10mm and evenly spaced at the following intervals;

At slope angles >10° to 15° – 450mm

At slope angles >15° to 18° – 400mm

At slope angles <18° – 350mm

## GRADES

Ind = Industrial 24  
HD = Heavy Duty 20  
OS = Offshore 16

## COLOURS

SY = Safety Yellow  
BK = Black  
BR = Brown  
GR = Green  
GY = Grey  
BL = Blue  
RD = Red  
WH = White  
Oth = Other

## FOUNDATIONS

GL = Galvabond® 1.2mm  
AL1.6 = 5052 Aluminium 1.6mm  
SS1.2 = 316 Stainless Steel 1.2mm



**ADVANCE ANTI-SLIP SURFACES Pty. Ltd.**

6A Aristoc Road, Glen Waverley 3150, Victoria, Australia

P: +61 3 9560 4488 F: +61 3 9562 0449 E: sales@advanceantislip.com

[www.advanceantislip.com](http://www.advanceantislip.com)