

The ideal solution for preventing costly accidents in slippery areas



# STAIR NOSINGS




Advance Anti-Slip Stair Nosings are a Class One, ready to install, metal backed product with a durable antislip surface designed for application in slippery or hazardous areas to provide firm footing.

Stair Nosings can be produced to suit any type of stair, ie: Steel mesh/grating or grille, checkerplate, concrete, timber, FRP, etc...



STANDARD SIZE COMBINATIONS		
Width (A)	Depth (B)	Return (C)
350 mm	50 mm	10 mm
450 mm	75 mm	20 mm
600 mm	150 mm	25 mm
750 mm	215 mm	
900 mm		
1200 mm		
Custom sizes available, Made To Order		

## HOW TO MEASURE

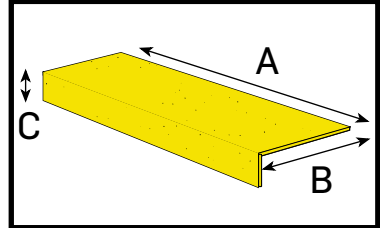

## METHOD OF INSTALLATION

- Over Grille:** Use universal clamp assembly.
- Over Steel-Aluminium-Masonry-Timber:** Use self-tapping screws, countersunk screws or rivets with a silicon sealer under the edges.
- Over Concrete:** Drive nails with a silicon sealer under the edges.

## PRODUCT FEATURES

- Provides secure footing on wet & oily surfaces.
- Highlights leading edge of step.
- High impact resistance.
- Excellent chemical & UV resistance.
- Pre-Drilled for simple installation.
- Durable with a long effective life.

GRADES	FOUNDATIONS
BF = Barefoot 80	GL = Galvabond® 1.2mm
Fine = Fine 46	GL3 = Galvabond® 3.0mm
Ind = Industrial 24	AL1.6 = 5052 Aluminium 1.6mm
HD = Heavy Duty 20	AL3 = 5052 Aluminium 3.0mm
OS = Offshore 16	SS1.2 = 316 Stainless Steel 1.2mm
	SS1.6 = 316 Stainless Steel 1.6mm

# LADDER RUNG COVERS




Advance Anti-Slip Ladder Rung Covers with the Semi Circular or Rectangular bend are a Class One, ready to install, metal backed product with a durable antislip surface designed to provide firm footing on any type of ladder.

Circular ladder rung covers snap fit to any type of round ladder rung. Easy to install with a sealant adhesive.



STANDARD SIZE COMBINATIONS	
Width (A)	Diameter of Rung (B)
250 mm	20 mm
300 mm	25 mm
350 mm	30 mm
400 mm	35 mm
450 mm	
500 mm	
Custom sizes available, Made To Order	

## HOW TO MEASURE

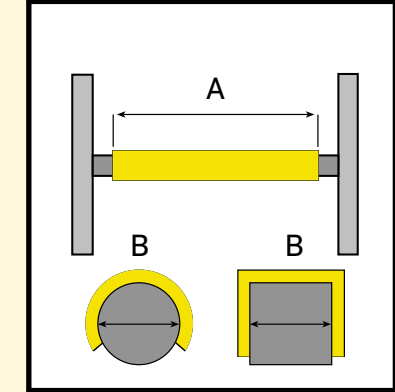

## METHOD OF INSTALLATION

- Ensure the ladder rungs are free from all dirt, oil, grease and paint.
- Apply 5mm of sealant adhesive to the inside of the ladder rung.
- Snap fit to ladder rung.

## PRODUCT FEATURES

- Provides secure footing on wet & oily surfaces.
- High impact resistance.
- Excellent chemical & UV resistance.
- Long effective life.
- Easy to clean.

GRADES	FOUNDATIONS
Fine = Fine 46	<b>Circular</b>
Ind = Industrial 24	CB = Colorbond® .55mm
HD = Heavy Duty 20	AL.8 = 5052 Aluminium .8mm
OS = Offshore 16	SS.55 = 316 Stainless Steel .55mm
	<b>Square</b>
	GL = Galvabond® 1.2mm
	AL1.6 = 5052 Aluminium 1.6mm
	SS1.2 = 316 Stainless Steel 1.2mm



# SAFEPLATES




Advance Anti-Slip Safeplates are a Class One, ready to install, metal backed product with a robust antislip surface. Provides firm footing on wet or oily surfaces and is designed for application in slippery or hazardous areas.

Safeplates can be produced to suit most situations where firm footing is required such as on Steel mesh/ grating or grille, checkerplate, concrete, timber, FRP, etc...

STANDARD SIZE COMBINATIONS		
Width (A)	+	Depth (B)
200 mm		100 mm
400 mm		200 mm
600 mm		400 mm
750 mm		600 mm
900 mm		
1200 mm		

Custom sizes available, Made To Order

## HOW TO MEASURE

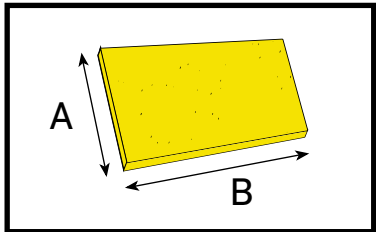

## PRODUCT FEATURES

- Provides secure footing on wet & oily surfaces.
- High impact resistance.
- Excellent chemical & UV resistance.
- Pre-Drilled for simple installation.
- Long effective life.
- Easy to clean.

## METHOD OF INSTALLATION

**Over Grille:** Use universal clamp assembly.  
**Over Steel-Aluminium-Masonry-Timber:** Use self-tapping screws, countersunk screws or rivets with a silicon sealer under the edges.  
**Over Concrete:** Drive nails with a silicon sealer under the edges.

## GRADES

BF = Barefoot	80
Fine = Fine	46
Ind = Industrial	24
HD = Heavy Duty	20
OS = Offshore	16

## FOUNDATIONS

GL = Galvabond® 1.2mm
GL3 = Galvabond® 3.0mm
AL1.6 = 5052 Aluminium 1.6mm
AL3 = 5052 Aluminium 3.0mm
SS1.2 = 316 Stainless Steel 1.2mm
SS1.6 = 316 Stainless Steel 1.6mm

# ANTISLIP TAPE

- Improve safety and performance in work areas
- Quick and easy to install
- A versatile economic solution
- Temperature resistant from -5°c to 50°c
- Helps prevent slips, falls and accidents
- Use on steps, ladders, ramps, platforms, gangways, construction equipment, trailers, forklifts, boats, trains, buses, work vehicles
- Australian Standard AS/NZS 4586:2004 compliant

## BLACK ANTISLIP TAPE



TAPE WIDTH	ROLL LENGTH
25mm	5m & 18m
50mm	5m & 18m
100mm	5m & 18m
150mm	5m & 18m
200mm	5m & 18m
450mm	5m & 18m

## YELLOW ANTISLIP TAPE



TAPE WIDTH	ROLL LENGTH
25mm	5m & 18m
50mm	5m & 18m
100mm	5m & 18m
150mm	18m
200mm	18m
450mm	18m

## BLACK / YELLOW ANTISLIP TAPE



TAPE WIDTH	ROLL LENGTH
25mm	5m & 18m
50mm	5m & 18m
100mm	5m & 18m
150mm	18m
200mm	18m
450mm	18m

## LUMINOUS ANTISLIP TAPE



TAPE WIDTH	ROLL LENGTH
50mm	5m



**"CAUTION" STRIP**  
Self Adhesive  
600mm x 150mm



**ANTISLIP STRIP (Pack of 5)**  
Self Adhesive  
300mm x 19mm



**"WATCH YOUR STEP" STRIP**  
Self Adhesive  
600mm x 150mm

Advance Anti-Slip Surfaces brings you technologically advanced antislip products designed to prevent accidents in internal or external areas where resilient, durable non-slip surfaces are required.

Our antislip products are manufactured to provide optimum toughness, strength and corrosion resistance.


Advance Anti-Slip products come in a wide variety of sizes that can be installed on many surfaces with an extensive range of grades and colours, in particular Safety Yellow which provides high visibility and clearly defines the leading edge of stairs.

# COLOUR SELECTOR

The colours shown below are the standard colour range available for Advance Anti-Slip products:



Safety Yellow – A.S. 2700 - Y26

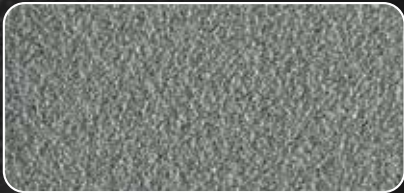

Grey – A.S. 2700 - N35



Black – A.S. 2700 - N61



Blue – A.S. 2700 - B24




Brown – A.S. 2700 - X65



Red – A.S. 2700 - R14



Green – A.S. 2700 - G12

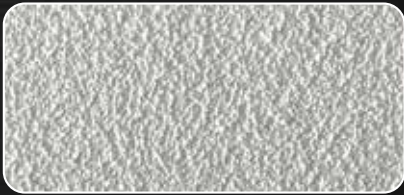

White – A.S. 2700 - N14

Computer screens are not able to display the exact colours as they appear on our products. Please use the colours on this flyer as a reference only. To be sure of selecting the correct colour, please visit one of our many resellers to view the colour samples selection ring.

**ADVANCE ANTI-SLIP SURFACES Pty. Ltd.**

ABN: 21 007 431 156

6A Aristoc Road, Glen Waverley 3150, Victoria, Australia

P: +61 3 9560 4488 F: +61 3 9562 0449 E: sales@advanceantislip.com