

STAIR NOSINGS



ADVANCE
ANTI-SLIP SURFACES P/L

30 years

Advance Anti-Slip Stair Nosings are a Class One, ready to install, metal backed product with a durable antislip surface designed for application in slippery or hazardous areas to provide firm footing.


Stair Nosings can be produced to suit any type of stair, ie: Steel mesh/grating or grille, checkerplate, concrete, timber, FRP, etc...

STANDARD SIZE COMBINATIONS

Width (A)	+	Depth (B)	+	Return (C)
350 mm		50mm		10mm
450 mm		75 mm		20 mm
600 mm		150 mm		25 mm
750 mm		215 mm		
900 mm				
1200 mm				

Custom sizes available, Made To Order

HOW TO MEASURE

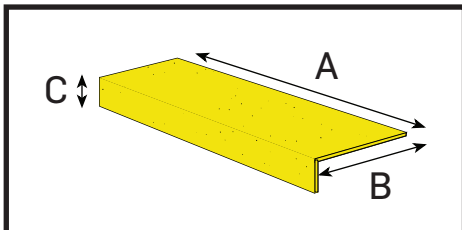


METHOD OF INSTALLATION

Over Grille: Use universal clamp assembly.

Over Steel-Aluminium-Masonry-Timber: Use self-tapping screws, countersunk screws or rivets with a silicon sealer under the edges.

Over Concrete: Drive nails with a silicon sealer under the edges.

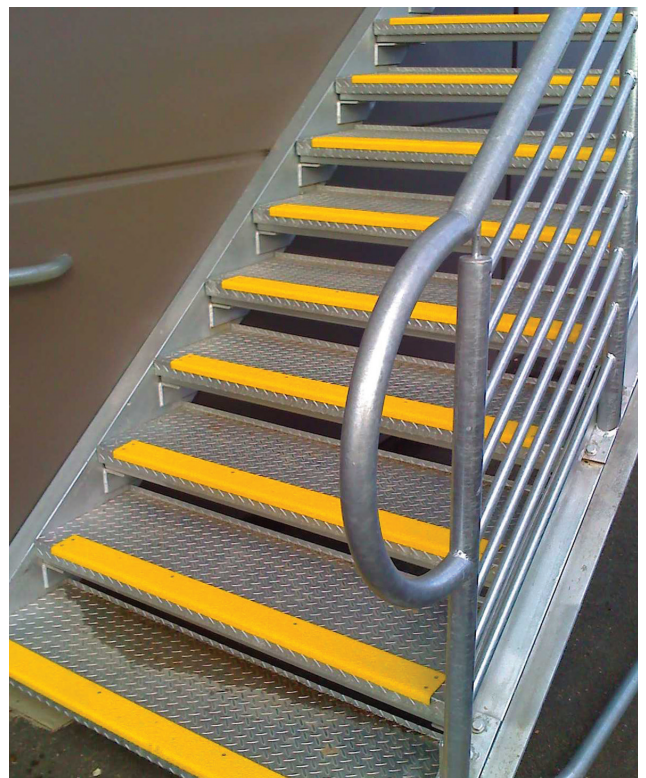

PRODUCT FEATURES

- Provides secure footing on wet & oily surfaces.
- Highlights leading edge of step.
- High impact resistance.
- Excellent chemical & UV resistance.
- Pre-Drilled for simple installation.
- Long effective life.

GRADES

BF = Barefoot	80
Fine = Fine	46
Ind = Industrial	24
HD = Heavy Duty	20
OS = Offshore	16

COLOURS

SY = Safety Yellow	BL = Blue
BK = Black	RD = Red
BR = Brown	WH = White
GR = Green	Oth = Other
GY = Grey	

FOUNDATIONS

GL = Galvabond® 1.2mm
GL3 = Galvabond® 3.0mm
AL1.6 = 5052 Aluminium 1.6mm
AL3 = 5052 Aluminium 3.0mm
SS1.2 = 316 Stainless Steel 1.2mm
SS1.6 = 316 Stainless Steel 1.6mm

ADVANCE ANTI-SLIP SURFACES Pty. Ltd.

6A Aristoc Road, Glen Waverley 3150, Victoria, Australia

P: +61 3 9560 4488 F: +61 3 9562 0449 E: sales@advanceantislip.com

www.advanceantislip.com